

Chase rebate into wall substrate
15mm min at 45deg

S/F polyurethane sealant to seal
flashing into wall to sheet
membrane and tiling

Strataflex Waterproofing Membrane
bonded to both floor & wall
areas using C-I Primer


S/F Polyurethane (soft joint)
colour matched to grout

10mm flashing gap
above tiling

Flooring substrate falls to 1:80 & 1:100

Bond-breaker 75mm wall x 75mm floor
to meet NCC 10.2.27(2)

'Z' Colourbond folded
flashing

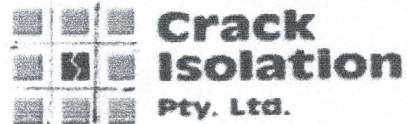

DRAWING TITLE:

SCALE:

DRAWING NO:

DATE:

DRAWING BY:

REVISION: